



PROUDLY SERVING CENTRAL KENTUCKY

SINCE 1931

CONCRETE PRECAST PRODUCTS

INSTALLATION INSTRUCTIONS

AVAILABLE UPON REQUEST

Phone # (859) 623-4238

Fax # (859) 623-4255

106 Industry Road

Richmond, KY. 40475

WWW.CONCRETEMATERIALS.CO

MADE IN HOUSE BY LOCAL SKILLED WORKERS

TABLE OF CONTENTS

- FARM PRODUCTS.....PAGE 3 – PAGE 7
- COMMERCIAL PRODUCTS.....PAGE 8 – PAGE 15
- CONCRETE TANKS.....PAGE 16 – PAGE 23
- STORM SHELTERS.....PAGE 24 – PAGE 26
- RESIDENTIAL PRODUCTS.....PAGE 27 – PAGE 40
- CONCRETE LIDS.....PAGE 41 – PAGE 46
- CONCRETE PADS.....PAGE 47 – PAGE 48

FARM PRODUCTS



CATTLE GUARDS

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 5/8 INCH STEEL REBAR AND FIBER MESH
- 1-FOOT HIGH, 12 OR 16 FEET LONG, AND 8 FEET WIDE
- 10 THREE INCH GIRDERS SPACED 4 ½ INCHES AT THE TOP AND 2 1/2 INCHES AT THE BASE
- WEIGHT OF 12 FOOT GUARD IS 8,500 LBS, WEIGHT OF 16 FOOT GUARD IS 10,500 LBS
- COST FOR 12 FOOT IS \$1811.00
- COST FOR 16 FOOT IS \$2415.00

FARM PRODUCTS



350 GALLON STOCK WATER TANK (WITH A BALL FLOAT BARRIER)

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- 2 FEET 7 INCHES AND 6 FEET 4 INCHES IN DIAMETER
- BALL FLOAT KEEPS THE WATER TO 22 INCHES INSIDE THE TANK
- THE SLOPE OF INSIDE WALL IS DESIGNED TO PREVENT FREEZING
- TOTAL WEIGHT IS 5,150 LBS
- COST IS \$604.00

FARM PRODUCTS



8 FOOT AND 12 FOOT CATTLE FEED TROUGH

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- 8 FOOT CATTLE FEED TROUGH MEASUREMENTS ARE 28 INCHES TALL, 8 FEET LONG, AND 39 INCHES WIDE
- 12 FOOT CATTLE FEED TROUGH MEASUREMENTS ARE 28 INCHES TALL, 12 FEET LONG AND 39 INCHES WIDE
- MADE WITH ONE END, TWO ENDS, OR NO ENDS (8 FOOT ONLY)
- TOTAL WEIGHT OF 8 FOOT FEED TROUGH 3000 LBS
- TOTAL WEIGHT OF 12 FOOT FEED TROUGH 4000 LBS
- COST FOR 8 FOOT WITH ANY COMBINATION \$284.00
- COST FOR 12 FOOT NO ENDS \$423.00, AND FEED TROUGH ENDS \$36.00

FARM PRODUCTS



8 FOOT FENCE LINE FEED BUNK

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- MEASUREMENTS ARE 30 INCHES TALL (BACKSIDE) 22 INCHES (FRONTSIDE), 8 FEET LONG, AND 34 INCHES WIDE
- MADE WITH FORK LIFT POCKETS IN THE BASE TO MOVE AROUND ON THE FARM
- TOTAL WEIGHT IS 2,800 LBS
- COST IS \$272.00


FARM PRODUCTS



350 GALLON STOCK WATER TANK PAD

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH ½ INCH STEEL REBAR AND FIBER MESH
- 5 FEET LONG, 5 FEET WIDE, 4 INCHES TALL
- 18 INCH CENTER HOLE ALLOWS FOR HEATING UNIT
- TOTAL WEIGHT 450LBS
- COST IS \$272.00

COMMERCIAL PRODUCTS

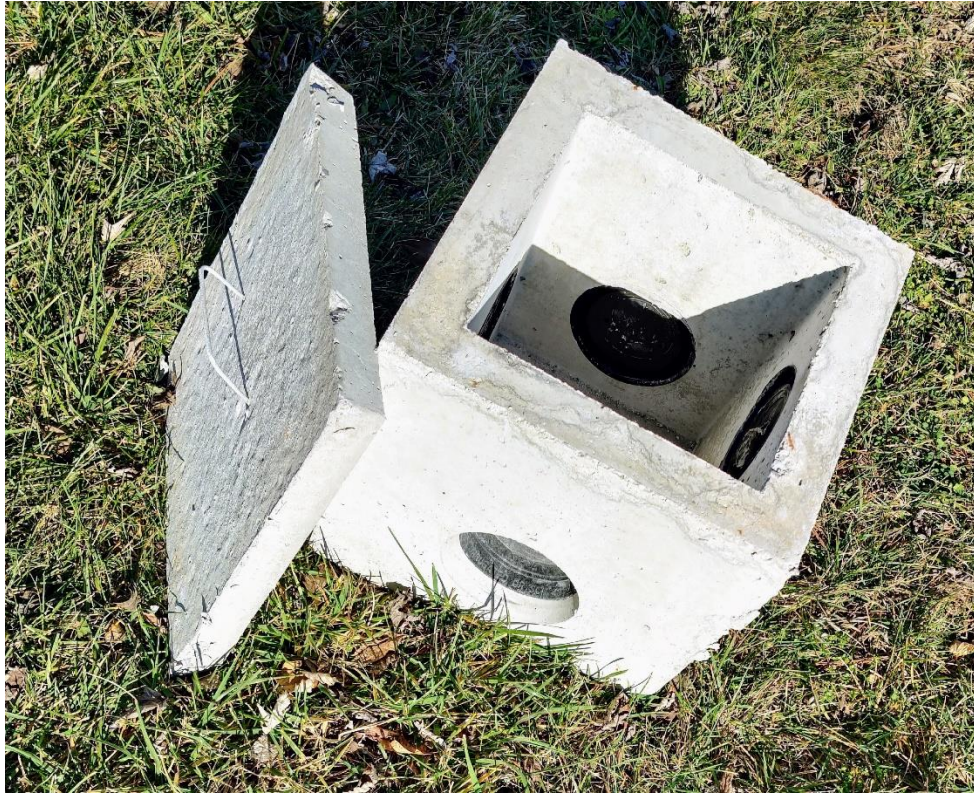

4-HOLE DISTRIBUTION BOX

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 10 GAUGE WIRE MESH, 3/8 INCH STEEL REBAR, AND FIBER MESH
- MEASUREMENTS ARE 15 INCHES SQUARED
- MULTI FIT POLYLOC PIPE SEAL (2 INCH, 3 INCHES, AND 4 INCH KNOCKOUT)
- TOTAL WEIGHT 175 LBS
- COST IS \$66.00

COMMERCIAL PRODUCTS



8-HOLE DISTRIBUTION BOX

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 10 GAGE WIRE MESH 3/8 INCH STEEL REBAR, AND FIBER MESH
- MEASUREMENTS FOR 8 HOLE DISTRIBUTION BOX IS 15 INCHES WIDE, 28 ½ INCHES LONG, 15 INCHES WIDE
- MULTI FIT POLYLOC PIPE SEAL (2 INCH, 3 INCH AND 4 INCH KNOCKOUT)
- TOTAL WEIGHT 225LBS
- COST IS \$97.00

COMMERCIAL PRODUCTS



CATCH BASIN

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- 30 ½ INCHES SQUARE AND 36 INCHES SQUARE TALL
- FRAME AND GRATE ARE 24 INCHES SQUARE, (SOLD SEPERATELY)
- TOTAL WEIGHT 2000 LBS
- COST IS \$211.00

COMMERCIAL PRODUCTS



CATCH BASIN EXTENSION

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8" STEEL REBAR AND FIBER MESH
- 30 ½ INCHES SQUARE AND 10 INCHES TALL
- TOTAL WEIGHT 320 LBS
- COST IS \$109.00

COMMERCIAL PRODUCTS



CONCRETE ADJUSTMENT RINGS

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- MADE 34 INCHES OUTSIDE DIAMETER AND 24 INCHES INSIDE DIAMETER
- 2 INCHES THICK WEIGHS 60 POUNDS
- 4 INCHES THICK WEIGHS 150 POUNDS
- 6 INCHES THICK WEIGHS 234 POUNDS
- 12 INCHES THICK WEIGHS 708 POUNDS
- COST FOR 12" IS \$103.00, = A 6" IS \$78.00
- 4" IS \$60.00, = 2" IS \$42.00

COMMERCIAL PRODUCTS



BARRIER BLOCK AND ½ BARRIER BLOCK

- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- BARRIER BLOCK IS 3 FEET WIDE BY 6 FEET LONG
- 1/2 BARRIER BLOCK IS 3 FEET WIDE BY 3 FEET LONG
- TOTAL WEIGHT OF BARRIER BLOCK IS 8000 POUNDS
- TOTAL WEIGHT OF ½ BARRIER BLOCK IS 4000 POUNDS
- COST FOR FULL SIZE IS \$121.00 / STONE FACE \$163.00
- COST FOR ½ SIZE IS \$82.00 / STONE FACE \$97.00

COMMERCIAL PRODUCTS



SIGN POST PYRAMID

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- BASE IS 23" SQUARE TAPERED TO 8" ON TOP BEING 16" TALL
- ACCEPTS 2"X 2" OD SQUARE POST
- COST IS \$193.00


COMMERCIAL PRODUCTS



LOW PROFILE CURB STOPS

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH ½ INCH STEEL REBAR AND FIBER MESH
- 9 INCHES WIDE BY 6 FEET LONG
- TOTAL WEIGHT OF 235 POUNDS
- COST IS \$36.00

CONCRETE TANKS

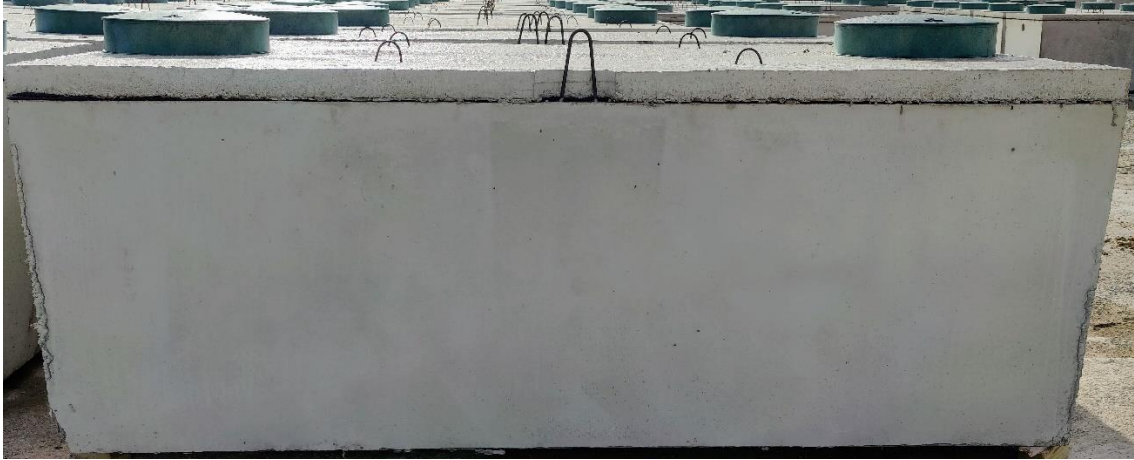

1500 GALLON SEPTIC TANK

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- DUAL COMPARTMENT 1000 GAL AND 500 GAL
- 78" WIDE, 149" LONG, 53" TALL
- INLET IS 42" TO THE BASE, OUTLET IS 39" TO THE BASE
- REINFORCED WITH 3/8" + ½ STEEL REBAR AND FIBER MESH
- TOTAL WEIGHT 12,000 LBS
- COST IS \$1045.00

CONCRETE TANKS



1500 GALLON SEPTIC TANK WITH HEAVY DUTY LID

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- DUAL COMPARTMENT 1000 GAL AND 500 GAL
- 78" WIDE, 149" LONG, 55 1/2" TALL
- INLET IS 42" TO THE BASE, THE OUTLET IS 39" TO THE BASE
- REINFORCED WITH 3/8" + 5/8" STEEL REBAR AND FIBER MESH
- TOTAL WEIGHT 14,000 LBS
- 6" HEAVY DUTY LID
- COST IS \$1383.00

CONCRETE TANKS



1500 GALLON PUMP TANK

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- DUAL COMPARTMENT 1000 GAL AND 500 GAL
- 78" WIDE, 149" LONG, 53" TALL
- 2-16" ACCESS LID WITH RISERS
- INLET IS 42" TO THE BASE, OUTLET IS 39" TO THE BASE
- REINFORCED WITH 3/8" + 1/2" STEEL REBAR AND FIBER MESH
- TOTAL WEIGHT 12,000 LBS
- COST IS \$1201.00
- SPECIAL ORDER ITEM

CONCRETE TANKS



2000 GALLON CISTERN

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- DUAL COMPARTMENT
- 78" WIDE, 149" LONG, 53" TALL
- 2-24" CIRCULAR ACCESS LIGHTWEIGHT PLASTIC LIDS
- REINFORCED WITH 3/8" + 1/2" STEEL REBAR AND FIBER MESH
- TOTAL WEIGHT 12,000 LBS
- COST IS \$1660.00

CONCRETE TANKS



1000 GALLON GREASE/OIL TRAP

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- DUAL COMPARTMENT
- 65" WIDE, 130" LONG, 54" TALL
- 2-24" CONCRETE ACCESS LID, AVAILABLE WITH GRADE RINGS AND CAST IRON FRAME AND LID
- INLET IS 40" TO THE BASE, OUTLET IS 37" TO THE BASE
- REINFORCED WITH ½" IN THE TANK, AND 5/8" STEEL REBAR IN THE LID AND FIBER MESH
- TOTAL WEIGHT 11,589 LBS
- COST IS \$4226.00

CONCRETE TANKS



1500 GALLON GREASE/OIL TRAP (NEW STYLE, OLD STYLE, CARWASH)

- **CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)**
- **DUAL COMPARTMENT 1000 GAL AND 500 GAL**
- **78" WIDE, 149" LONG, 57" TALL**
- **2-24" CONCRETE ACCESS LID, AVAILABLE WITH GRADE RINGS AND CAST IRON FRAME AND LID**
- **INLET IS 42" TO THE BASE, OUTLET IS 39" TO THE BASE**
- **REINFORCED WITH ½" + 5/8" STEEL REBAR AND FIBER MESH**
- **CAN BE USED AS CARWASH TANK**
- **TOTAL WEIGHT 24,250 LBS**
- **COST FOR NEW STYLE TRAFFIC RATED \$4859.00**
- **COST FOR OLD STYLE \$1841.00**

CONCRETE TANKS



1000 GALLON SEPTIC TANK (LOW PROFILE)

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 65" WIDE, 130" LONG, 51" TALL
- INLET IS 40" TO THE BASE, OUTLET IS 37" TO THE BASE
- 2-16" ACCESS LID WITH RISER
- REINFORCED WITH 3/8" AND 1/2" STEEL REBAR AND FIBER MESH
- TOTAL WEIGHT 9,000 LBS
- 1 PIECE TANK AND LID
- COST IS \$866.00

CONCRETE TANKS



1000 GALLON PUMP TANK

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 65" WIDE, 130" LONG, 51" TALL
- INLET IS 40" TO THE BASE, OUTLET IS 37" TO THE BASE
- 1-22" ACCESS LID WITH RISER
- REINFORCED WITH 3/8" AND 1/2" STEEL REBAR AND FIBER MESH
- TOTAL WEIGHT 9,000 LBS
- 1 PIECE TANK AND LID
- NO BAFFEL CONSTRUCTION
- COST IS \$996.00

STORM SHELTER/ SAFE ROOM



FAMILY STORM SHELTER/SAFE ROOM

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 78" WIDE, 100" LONG, 56" TALL
- 6" STEEL REINFORCED LID
- REINFORCED WITH 3/8" + 5/8" STEEL REBAR AND FIBER MESH
- STEEL DOOR OPENING 24" BY 42"
- WEIGHS 10,000 LBS
- 2 FRESH AIR VENT PIPES'
- COST IS \$ 1811.00

STORM SHELTER/SAFE ROOM



FAMILY STORM SHELTER/SAFE ROOM (TORNADO TUBE)

- **CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)**
- **64" WIDE, 142" LONG, 80" TALL**
- **REINFORCED WITH ½" STEEL REBAR AND FIBER MESH**
- **STEEL DOOR OPENING 45" BY 26"**
- **WEIGHS 18,000 LBS**
- **COST IS \$3381.00**

STORM SHELTER/SAFE ROOM



FEMA APPROVED FAMILY STORM SHELTER/SAFE ROOM (TORNADO TUBE)

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 64" WIDE, 142" LONG, 80" TALL
- REINFORCED WITH ½" STEEL REBAR AND FIBER MESH
- STEEL DOOR OPENING 45" BY 26"
- WEIGHS 18,000 LBS
- COST IS \$5192.00

RESIDENTIAL PRODUCTS



SPLASH BLOCK

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 24" LONG AND 12" WIDE
- REINFORCED WITH FIBER MESH
- TOTAL WEIGHT 55 LBS
- COST IS \$13.00

RESIDENTIAL PRODUCTS



HEXAGON STEPPING STONES

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH FIBER MESH
- 18" LONG AND 18" WIDE
- TOTAL WEIGHT 44 LBS
- COST IS \$11.00

RESIDENTIAL PRODUCTS



SINGLE MAILBOX

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 23" LONG, 12" WIDE, 55" TALL
- MAILBOX IS 19" DEEP, 6" WIDE
- NEWSPAPER HOLDER 15 ½" DEEP AND 8" WIDE
- EXPOSED AGGREGATE FINISH
- REINFORCED WITH FIBER MESH
- COST IS \$604.00

RESIDENTIAL PRODUCTS



LARGE MAILBOX WITH FLOWER POTS

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 60" LONG, 24" WIDE, 52" TALL
- 2- 11"X18" ATTACHED FLOWER POTS
- NEWSPAPER HOLDER IS 15 ½ DEEP AND 8" WIDE
- MAILBOX IS 19" DEEP AND 6" WIDE
- EXPOSED AGGREGATE FINISH
- REINFORCED WITH FIBER MESH
- COST IS \$906.00

RESIDENTIAL PRODUCTS



“THE KING” MAILOX WITH PLANTER ON TOP

- **CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)**
- **24” LONG, 24” WIDE, 64” TALL**
- **SINGLE FLOWER POT IN THE TOP OF THE BOX WITH DRAIN**
- **NEWSPAPER HOLDER IS 15 ½ DEEP AND 8” WIDE**
- **MAILBOX IS 19” DEEP AND 6” WIDE**
- **EXPOSED AGGREGATE FINISH**
- **REINFORCED WITH FIBER MESH**
- **COST IS \$724.00**

RESIDENTIAL PRODUCTS



PLANTER VASE

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 25" ROUND, 16" INSIDE DEPTH, 25" TALL
- PAINTED OR STAINED EXTERIOR OPTIONAL
- REINFORMCED WITH FIBER MESH
- DECORATIVE DESIGN
- COST IS \$103.00

RESIDENTIAL PRODUCTS



BIRD BATH

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 18 ½" ROUND AND 25" TALL
- INSIDE DEPTH OF 1 ¾" TO HOLD WATER
- REINFORCED WITH FIBER MESH
- DECORATIVE DESIGN
- COST IS \$42.00

RESIDENTIAL PRODUCTS



DECORATIVE ROUND TABLE

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 43" ROUND AND 30" TALL
- REINFORCED WITH 3/8" STEEL REBAR AND FIBER MESH
- DECORATIVE DESIGN
- UMBRELLA HOLE
- INCLUDES PEDESTAL AND TOP
- COST IS \$151.00

RESIDENTIAL PRODUCTS



DECORATIVE SQUARE TABLE

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 57" LONG, 30" WIDE, 30" TALL
- REINFORCED WITH 3/8" STEEL REBAR AND FIBER MESH
- DECORATIVE DESIGN
- UMBRELLA HOLE
- INCLUDES PEDESTAL AND TOP
- COST IS \$151.00

RESIDENTIAL PRODUCTS



DECORATIVE BENCH

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- 57" LONG, 20" WIDE, 18" TALL
- REINFORCED WITH 3/8" STEEL REBAR AND FIBER MESH
- 3 PIECE DESIGN ALLOWS FOR EASY HANDLING AND SET UP
- DECORATIVE DESIGN
- COST FOR LARGE SIZE IS \$109.00

RESIDENTIAL PRODUCTS



DRIVEWAY MARKER WHOLE & HALF SIZES

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- WHOLE SIZE; BASE MEASURES 12" SQUARE AND 12 ½" TALL
- HALF SIZE; BASE MEASURES 9 ½" SQUARE AND 9" TALL
- REINFORCED WITH 5/8" STEEL REBAR AND FIBER MESH
- 5/8" STEEL REBAR EMBEDDED IN MARKER WITH 8" EXPOSED FOR POST
- PYRAMID SHAPES ALLOWS FOR HIGH VISIBILITY
- COST IS \$6.00 (SMALL) AND \$13.00 (LARGE)

RESIDENTIAL PRODUCTS



FIRE RING (Large)

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- 18" HIGH AND 6 FEET 4 INCHES IN DIAMETER
- INSTALLATION INSTRUCTIONS AVAILABLE UPON REQUEST
- CUSTOM COLOR AT ADDITIONAL COST
- CUSTOM HEIGHT AVAILABLE
- COST IS \$236.00

RESIDENTIAL PRODUCTS



FIRE RING (Small)

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- 12" HIGH AND 4 FEET 9 INCHES IN DIAMETER
- INSTALLATION INSTRUCTIONS AVAILABLE UPON REQUEST
- CUSTOM COLOR AT ADDITIONAL COST
- COST IS \$211.00

RESIDENTIAL PRODUCTS



GAS FIRE PIT RING

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8 INCH STEEL REBAR AND FIBER MESH
- 32" HIGH AND 4 FEET 9 INCHES IN DIAMETER
- INSTALLATION INSTRUCTIONS AVAILABLE UPON REQUEST
- CUSTOM COLOR AT ADDITIONAL COST
- COST IS \$272.00

CONCRETE LIDS



4-HOLE DISTRIBUTION BOX LID

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8" STEEL REBAR AND FIBER MESH
- 15 3/4" SQUARE AND 2" THICK
- COST IS \$30.00

CONCRETE LIDS



8-HOLE DISTRIBUTION BOX LID

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH 3/8" STEEL REBAR AND FIBER MESH
- 28" LONG, 15" WIDE, 2" THICK
- COST IS \$36.00

CONCRETE LIDS



1500 GALLON GREASE TRAP ACCESS LID

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH FIBER MESH
- AVAILABLE IN 35" ROUND OR 26" ROUND
- COST IS \$60.00

CONCRETE LIDS



1000 GALLON OR 750 GALLON SEPTIC TANK LID WITH 24" RISER

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH ½" STEEL REBAR AND FIBER MESH
- 58" WIDE AND 32" LONG
- WITH 24" RISER AND ACCESS LID
- COST IS \$152.00

REPLACEMENT LID FOR 1970'S LID

CONCRETE LIDS



1500 GALLON TANK OR 1000 GALLON SEPTIC TANK ACCESS LID WITH 6" PVC COUPLING

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH FIBER MESH
- 15 ¾" SQUARE
- COST IS \$30.00

CONCRETE LIDS



1000 GALLON OR 750 GALLON SEPTIC TANK LID WITH 6" PVC COUPLING

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- REINFORCED WITH ½" STEEL REBAR AND FIBER MESH
- 58" WIDE AND 32" LONG
- COST IS \$151.00

REPLACEMENT LID FOR 1970'S LID

CONCRETE PADS



TRANSFORMER PAD

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- SIZES IN STOCK
 1. 40" WIDE, 52" LONG, 4" THICK, COST IS \$163.00
 2. 5' WIDE, 7'-6" LONG, 6" THICK, COST IS \$423.00
 3. 7' WIDE, 7'-6" LONG, 6" THICK, COST IS \$537.00
 4. 9' WIDE, 9" LONG, 6" THICK, COST IS \$706.00
- REINFORCED ACCORDING TO SIZE WITH STEEL REBAR AND FIBER MESH
- TOTAL WEIGHT VARIES DUE TO SIZE OF PAD
- CUSTOM SIZE UPON REQUEST

CONCRETE PADS



AIR CONDITIONING PADS

- CONCRETE RATED FOR 4000 POUNDS PER SQUARE INCH (4000 PSI)
- SIZE IN STOCK
 1. 24" WIDE, 24" LONG, 2 ¼" THICK, COST IS \$34.00
 2. 30" WIDE, 30" LONG, 2 ¼" THICK, COST IS \$42.00
 3. 36" WIDE, 36" LONG, 2 ¼" THICK, COST IS \$48.00
- REINFORCED ACCORDING TO SIZE WITH STEEL REBAR AND FIBER MESH
- TOTAL WEIGHT VARIES DUE TO SIZE OF PAD